

THERMOSTATIC MIXING VALVE WITH PEX B

Project Name: _____
 Easyflex Rep: _____
 Engineer: _____
 Contractor: _____

Part # Ordered: _____
 Submitted By: _____
 Approved By: _____
 Date Submitted: _____

PRODUCT FEATURES


The Thermostatic Mixing Valve is designed with a lead-free brass construction to ensure safety and durability, providing an adjustable temperature range of 86°F to 120.2°F for optimal comfort. It supports a maximum supply pressure of 125 psi and features multiple connection options, making it compatible with various plumbing systems. Additionally, this valve complies with NSF/ANSI certifications, ensuring reliable performance and adherence to safety standards, making it an ideal choice for both residential and commercial applications.



PART #	SIZE	DESCRIPTION
□ EF-MV-12PX	1/2"	PEX B Crimp (F1807) MIXING VALVE

CERTIFICATIONS

ASSE 1016, ASSE 1069, ASSE 1070,
 ASSE 1017, CSA B125.3, NSF/ANSI372,
 NSF/ANSI61 CERTIFICATED AND CSA LISTED

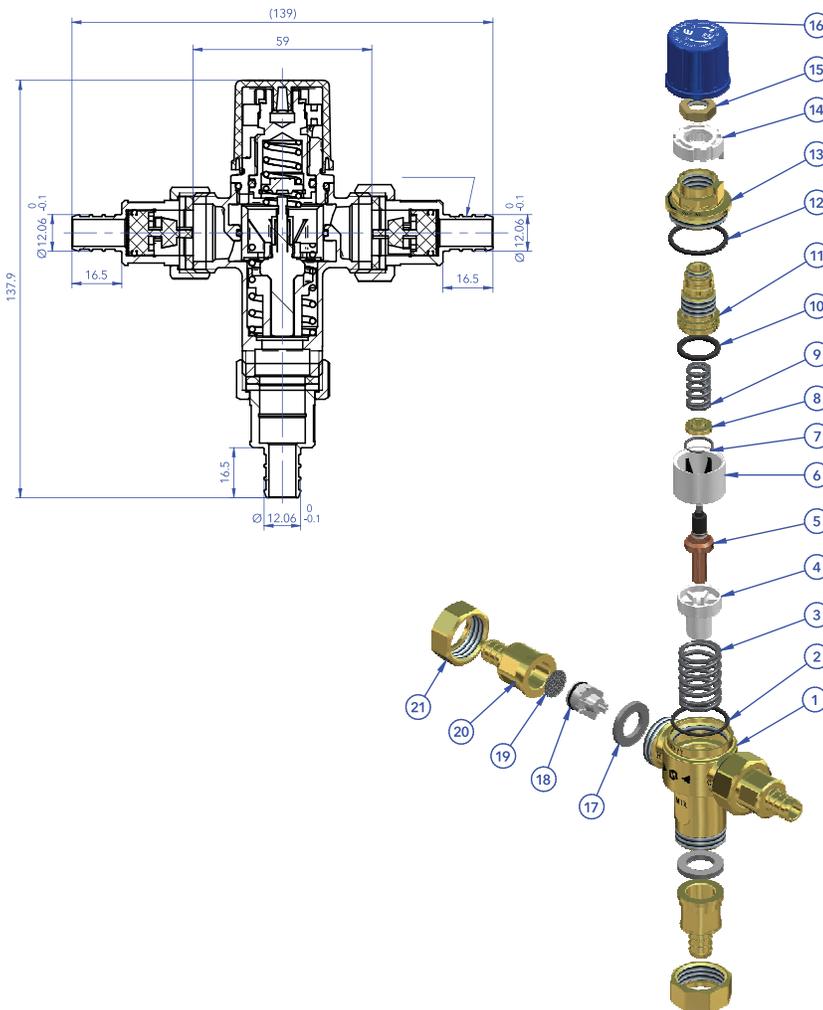

MATERIAL SPECIFICATIONS

No.	Name	Materials	Qty
1	Body	Brass	1
2	O-ring	EPDM	1
3	Spring	Stainless steel	1
4	Piston	PSU	1
5	Thermostat	T2	1
6	Water flow	PSU	1
7	Washer	Stainless steel	1
8	Locking cap	Brass	1
9	Spring	Stainless steel	1
10	O-ring	EPDM	1
11	Stem	Brass	1
12	O-ring	EPDM	1
13	Bonnet	Brass	1
14	Locating ring	POM	1
15	Hex-nut	Brass	1
16	Cap	ABS	1
17	Washer	EPDM	3
18	Check valve	POM	2
19	Strainer	Stainless steel	2
20	Press pipe	Brass	3
21	Union nut	Local brass	3