
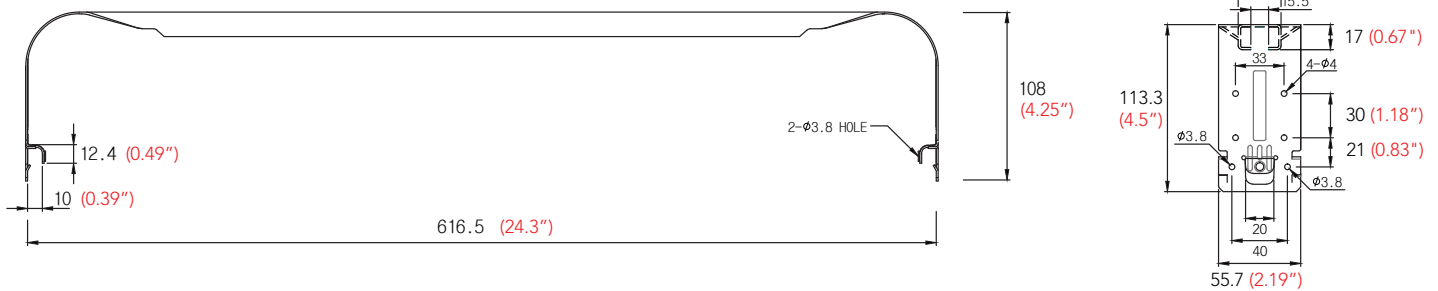



EASYFLEX®**OGSB-02 / OPEN GATE SNAP SYSTEM BRACKET**

Scale	NS
Material	ASTM A-366
Tolerance	2.0mm, ± 0.05
Specification	Zinc Plated
Coating durability	No indication of peeling
Anti-Corrosion	No indication of corrosion with salt spray test.

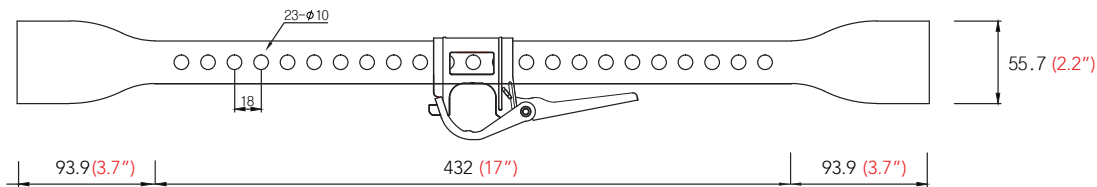

OPEN GATE CENTER BRACKET **OSSB**

Scale	NS
Material	ASTM A-366
Tolerance	2.0mm, ± 0.05
Spec.	Zinc Plated
Coating durability	No indication of peeling
Anti-Corrosion	No indication of corrosion with salt spray test.



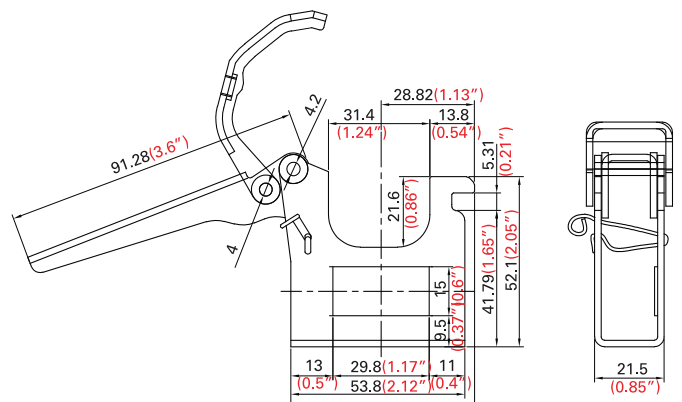


PRODUCT DETAILS

EASYFLEX®

OTBSL-PA BRACKET FOR SUSPENDED AND HARD-LID CEILINGS

Scale	NS
Material	ASTM A-366
Tolerance	±0.3
Thickness	2.0 mm, ±0.05 mm
Specification	Zinc plated
Coating Durability	No indication of peeling
Anti-Corrosion	No indication of corrosion with salt spray test

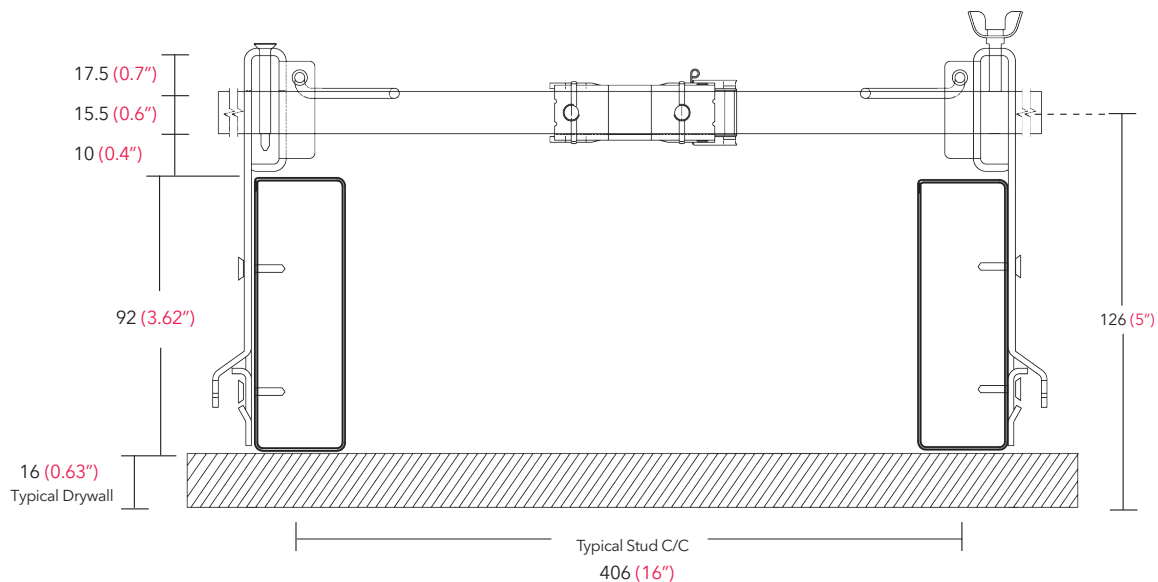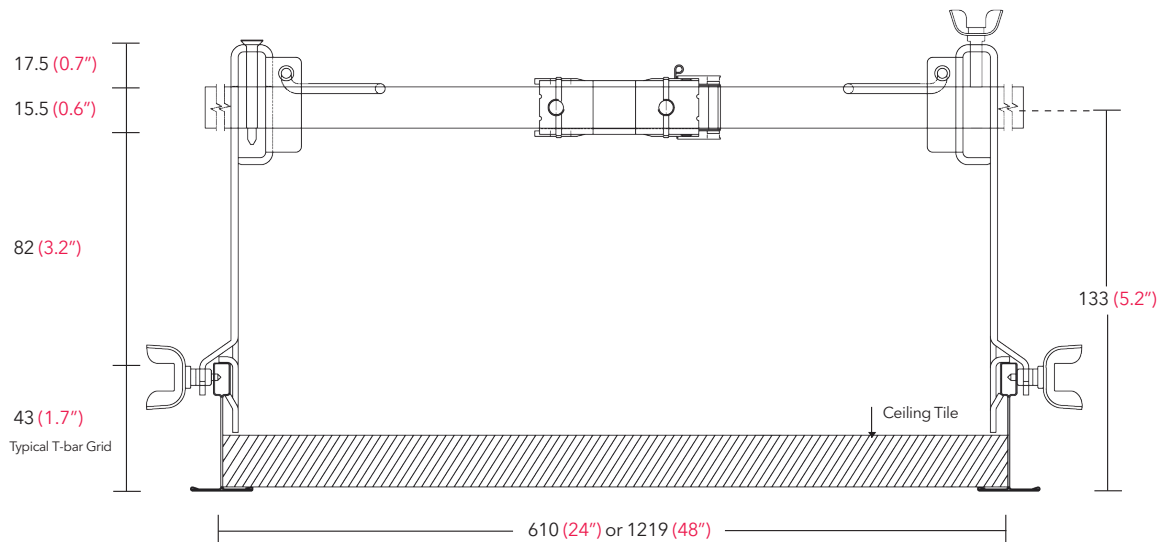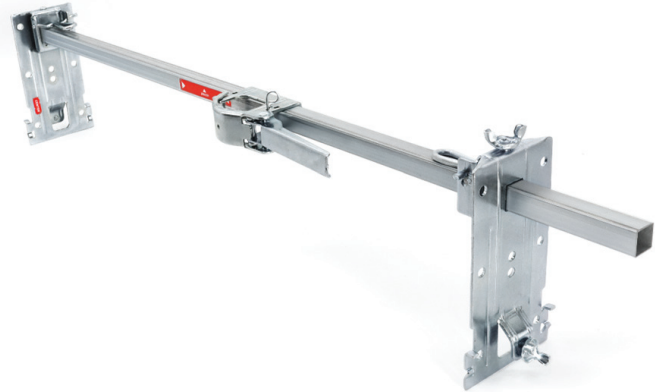


PRODUCT DETAILS




EASYFLEX®

TBS BRACKET FOR SUSPENDED AND HARD-LID CEILINGS


Scale	NS
Material	ASTM A-366
Tolerance	±0.3
Thickness	2.0 mm, ±0.05 mm
Specification	Zinc plated
Coating Durability	No indication of peeling
Anti-Corrosion	No indication of corrosion with salt spray test

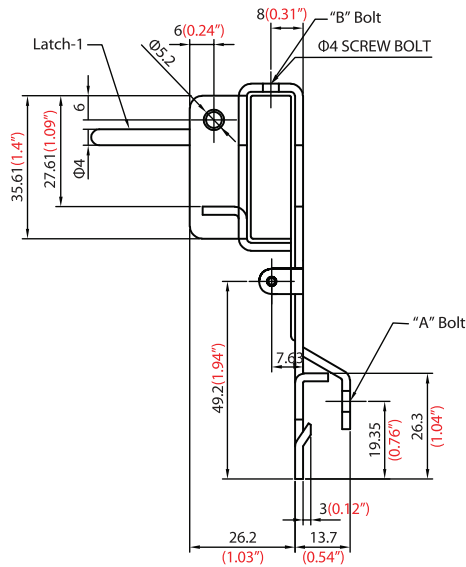

"A" BOLT MATERIAL: ASTM A-36
"B" BOLT MATERIAL: ANSI 1010
LATCH-1 MATERIAL: ASTM A-603

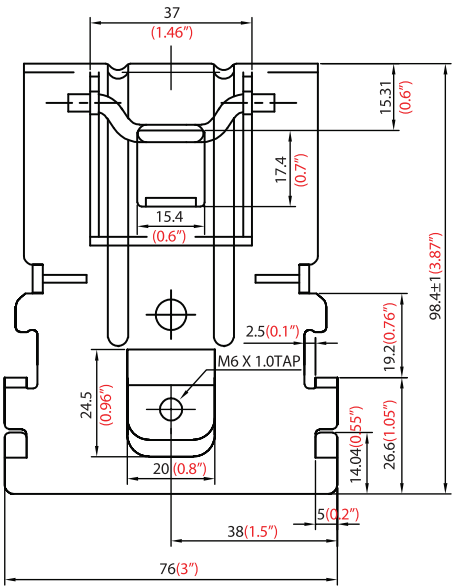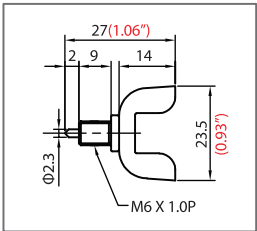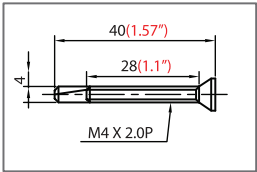

Scale	NS
Material	ASTM A-603
Tolerance	±1.0

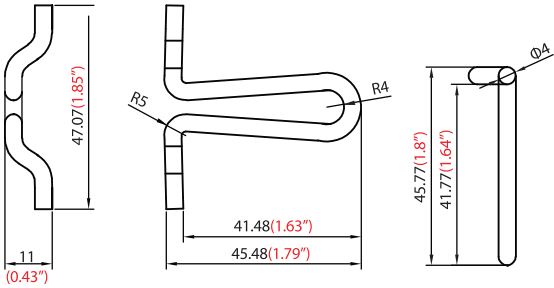


PRODUCT DETAILS

EASYFLEX®

OTBSS-PA BRACKET FOR SUSPENDED CEILINGS / LOW-PROFILE

Scale	NS
Material	ASTM A-366
Tolerance	±0.3
Thickness	2.0 mm, ±0.05 mm
Specification	Zinc plated
Coating Durability	No indication of peeling
Anti-Corrosion	No indication of corrosion with salt spray test

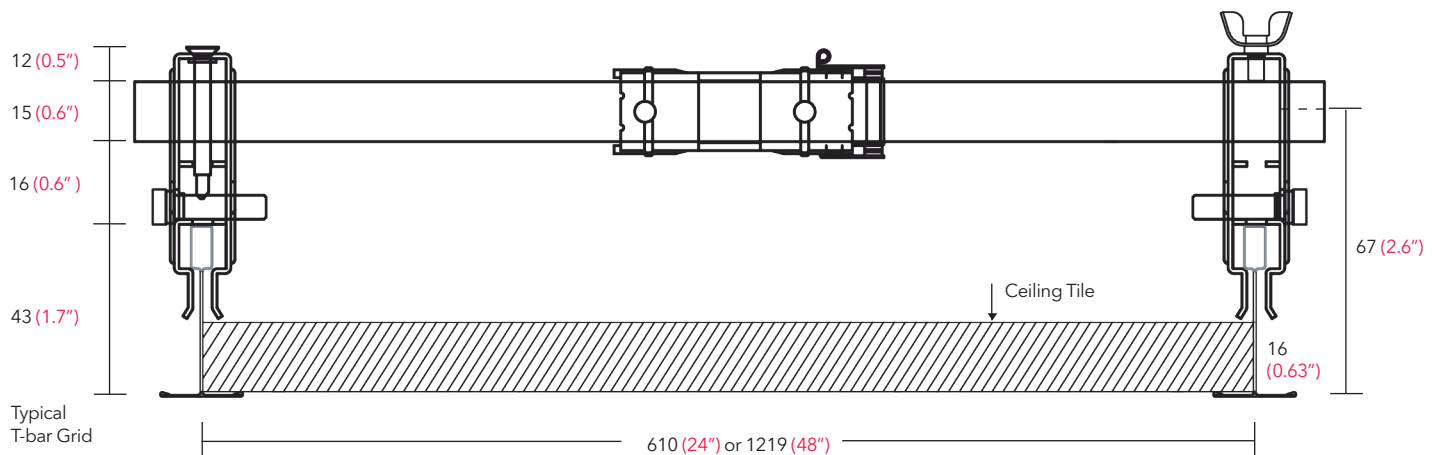


PRODUCT DETAILS

EASYFLEX

OHCB-PA BRACKET FOR HAT FURRING CHANNELS

Scale	NS
Material	ASTM A-366
Tolerance	±0.3
Thickness	2.0 mm
Specification	Zinc plated
Coating Durability	No indication of peeling
Anti-Corrosion	No indication of corrosion with salt spray test



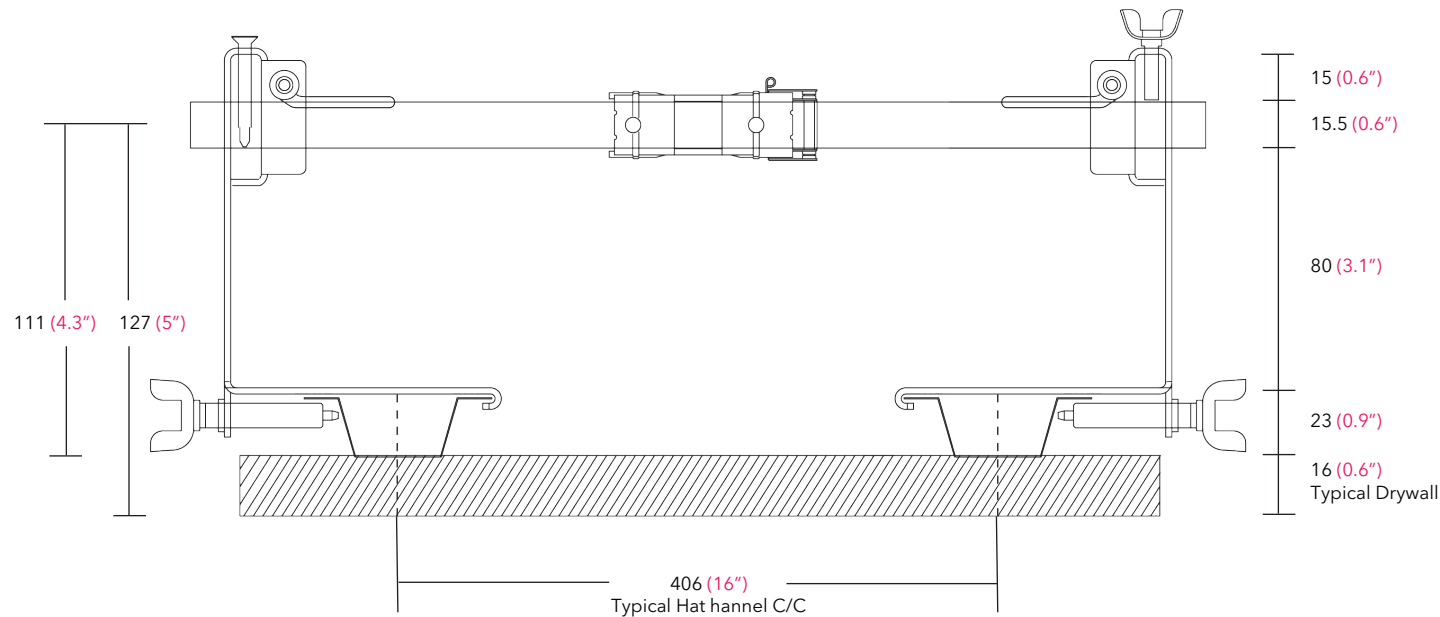


PRODUCT DETAILS

EASYFLEX®

OWMSB-PA BRACKET FOR HARD-LID CEILINGS

Scale	NS
Material	ASTM A-366
Tolerance	±0.3
Thickness	2.0 mm, ±0.05 mm
Specification	Zinc plated
Coating Durability	No indication of peeling
Anti-Corrosion	No indication of corrosion with salt spray test

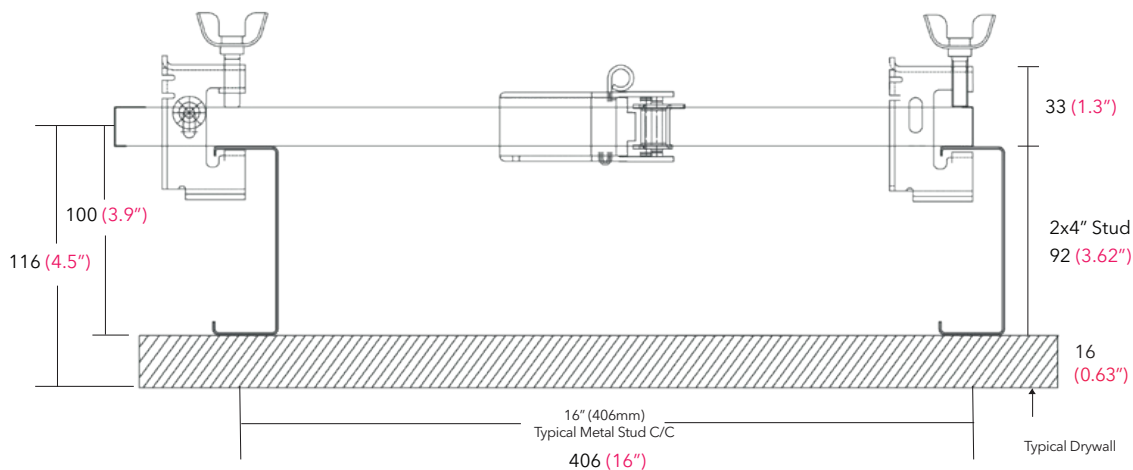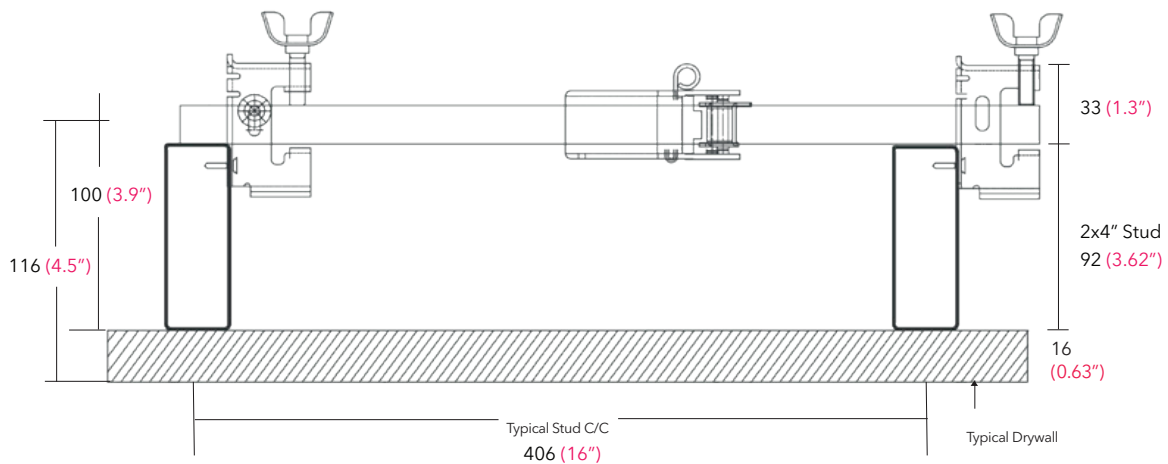
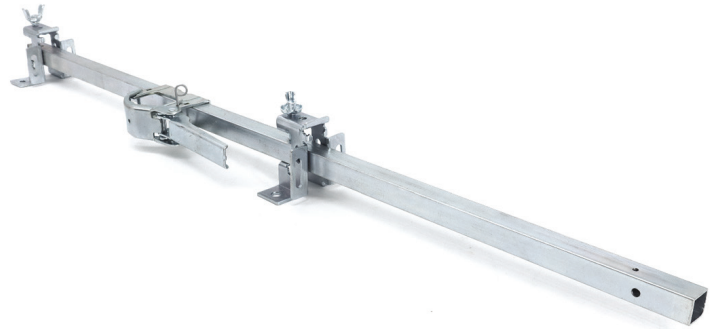


PRODUCT DETAILS

EASYFLEX®

OSSBW INSTITUTIONAL SIDEWALL AND SURFACE-MOUNT BRACKET

Scale	NS
Material	ASTM A-366
Tolerance	±0.2
Thickness	2.0 mm, ±0.05
Specification	Zinc plated
Coating Durability	No indication of peeling
Anti-Corrosion	No indication of corrosion with salt spray test

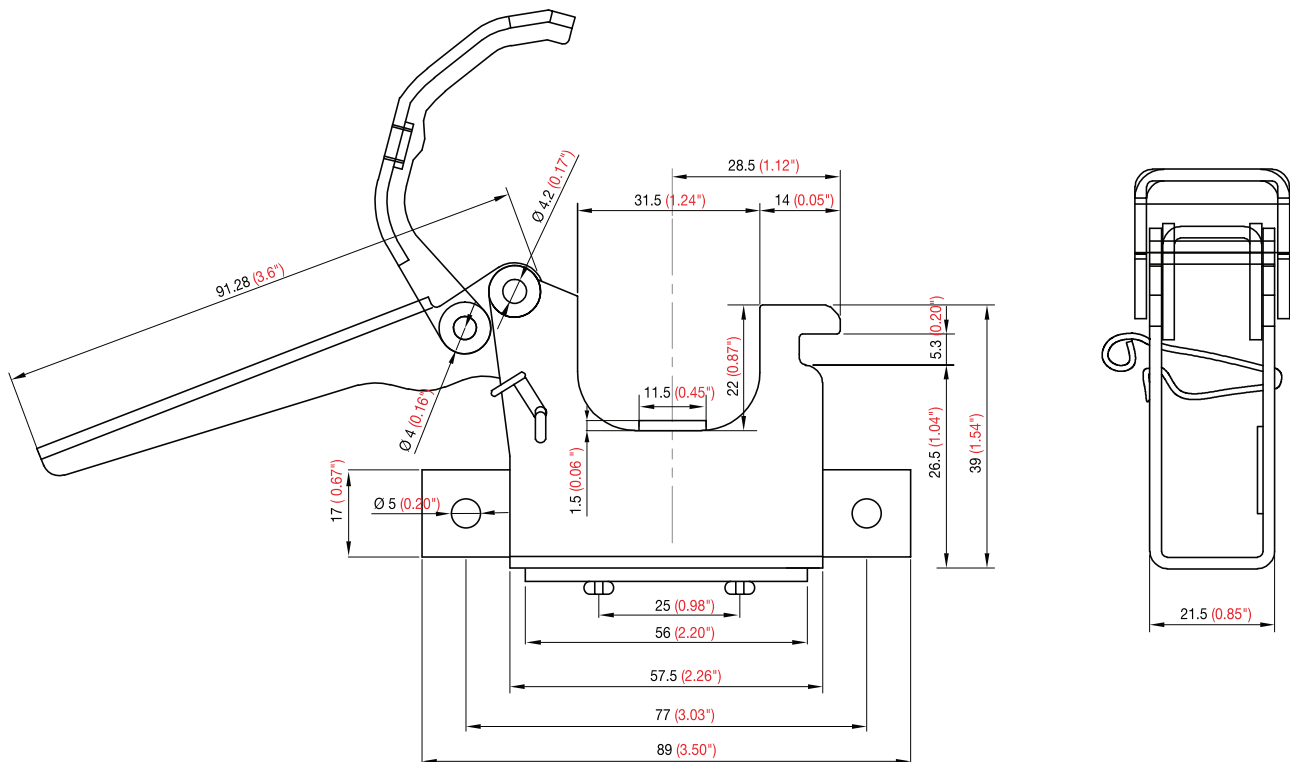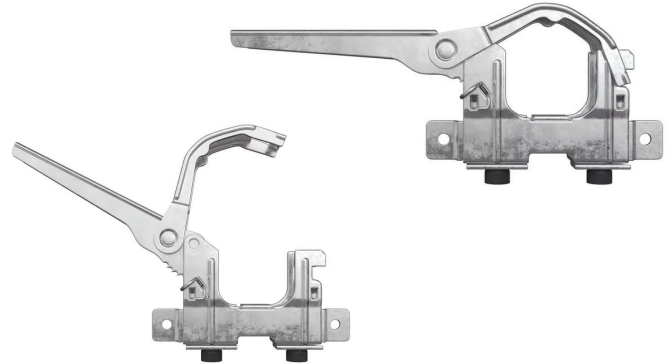

PRODUCT DETAILS

EASYFLEX®

LRD (LRDS, LRD L) ELBOW REDUCER

Scale	NS
Material	ASTM A-53, Gr A
Tolerance	±0.2
Thickness	12.7 µm
Specification	Zinc plated
Coating Durability	No indication of peeling
Anti-Corrosion	No indication of corrosion with salt spray test

