

ThermaMix Pro

Mixing Valve Kit with Temp Gauge

EF-MV SERIES

Easyflex thermostatic mixing valves provide precise temperature control and scald protection for residential, commercial, and industrial applications. Constructed from durable C46500 brass for reliable, long-lasting performance.



FEATURES

- Prevents Scalding & Burning
- Maintains Desired Water Temperature
- Increases Usable Hot Water Capacity
- Reduces Energy Consumption
- Built-In Temperature Gauge
- Factory Preset at 105.8°F (41°C)

MATERIALS

Mixing Valve Body	Lead-Free C46500 Brass
Braided Connector	Stainless Steel Braided Hose
Sealing Components	EPDM Elastomer Seals

CERTIFICATIONS & APPROVALS

- NSF/ANSI 61, NSF/ANSI 372 Lead Free
- ASSE1017, 1070, A112, CSA B1 25.70-15



SPECIFICATIONS

Valve Type	Thermostatic Mixing Valve Kit
Standards	ASSE 1017, ASSE 1070
Flow Rate	1.0 GPM Min.
Inlet Connection	3/4" Union
Outlet Connection	3/4" Male NPT
Recirculation Port	1/2" Female NPT
Temperature Range	89.6°F - 129.2°F
Factory Preset	105.8°F
Max. Working Pressure	150 PSI
Connector	3/4" FIP x 3/4" FIP, 18" Length
Temperature Gauge	Included
Application	Residential, Commercial & Industrial

JOB NAME:

ENGINEER / ARCHITECT:

JOB LOCATION:

WHOLESALE:


SUBMITTAL DATE:

CONTRACTOR:

PRODUCT LINEUP

PART #	DESCRIPTION	QTY/BOX
EF-MV-01G	3/4" NPT brass-alloy thermostatic mixing valve with thermostate, 18"L, 3/4" FIP x 3/4" FIP stainless steel braided connector, brass fittings	24

THERMOSTAT DIMENSIONS

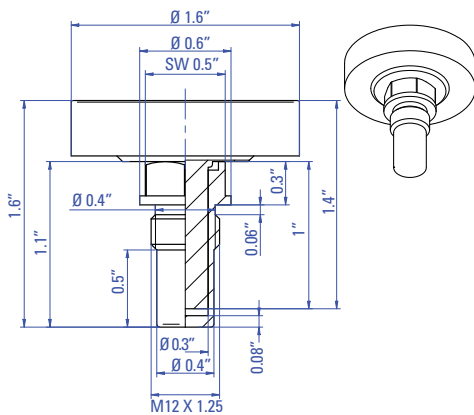

MIXING VALVE DIMENSIONS

